



## Product Change Notices

PCN No.:PCN20201101

Date: 2020/11/12

This is to inform you that **AME9172M** datasheet has been changed from **Rev. C.01 to Rev. D.01**. This notification is for your information and concurrence.

If you require Qual/Rel data or samples to qualify this change, please contact AME, Inc. directly or through AME's authorized Sales Representative or Distributor within 30 days.

Please note this PCN will be effective 30 days after the issuing date automatically if we do not receive any response, comment or questions from you.

If you have any questions concerning this change, please contact:

**PCN Originator:**

**Name: Michael.Chang**

**Email: michaelc@ame.com.tw**

**Description of Change (From):**

**Support DDR2/DDR3/DDR3L**

**Description of Change (To):**

**Support DDR2/DDR3**

**Reason for Change:**

**Can not Support DDR3L**

## ■ General Description

The AME9172M is a voltage regulator which could convert the input voltage ranging from 1.5V to 2.5V to an output voltage that user settled. The regulator can provide 2A sourcing or sinking current. The AME9172M used in conjunction with series termination resistors, provides an excellent voltage source for active termination schemes of high speed transmission lines as those seen in high speed memory buses and distributed backplane designs. The AME9172M maintains stable, only requires 10 $\mu$ F (or 10 $\mu$ Fx2) of ceramic output capacitance.

The voltage output of the regulator can be used as a termination voltage for DDR SDRAM.

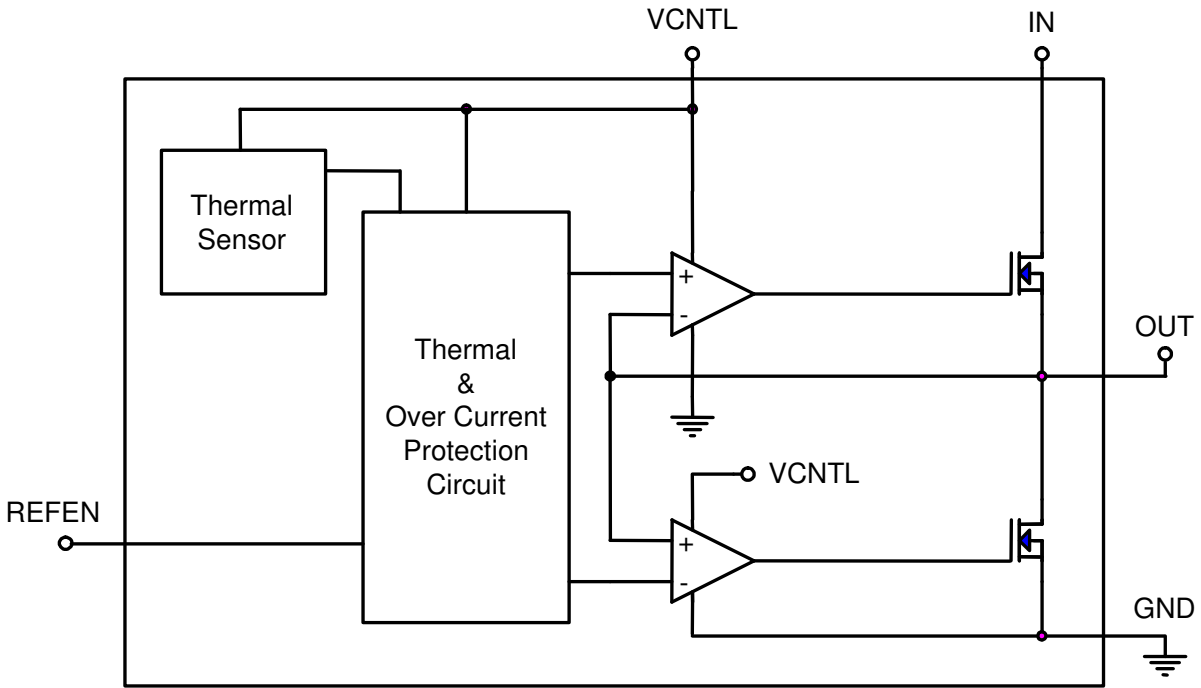
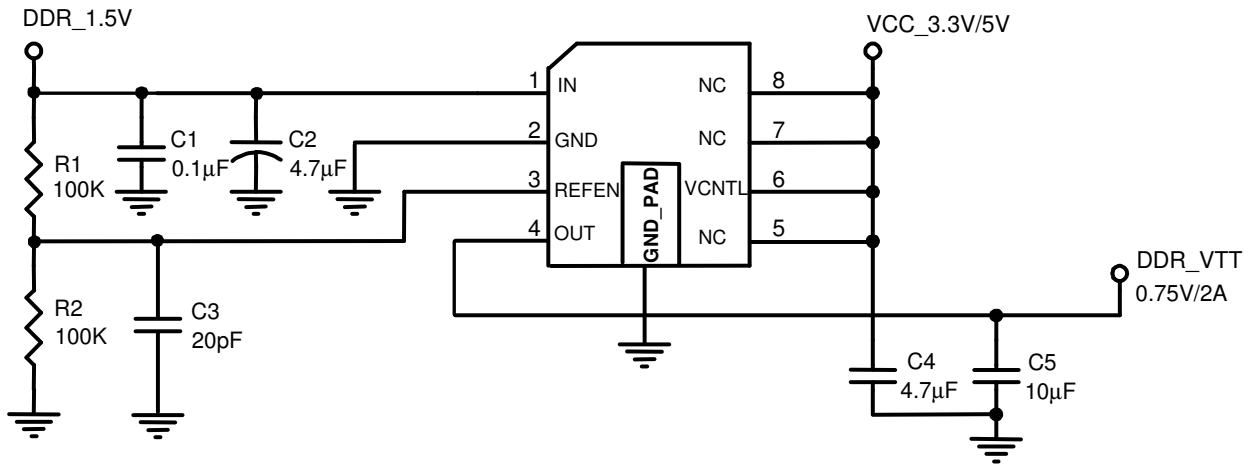
Current limits in both sourcing and sinking mode, plus on-chip thermal shutdown make the circuit tolerant of the output fault conditions.

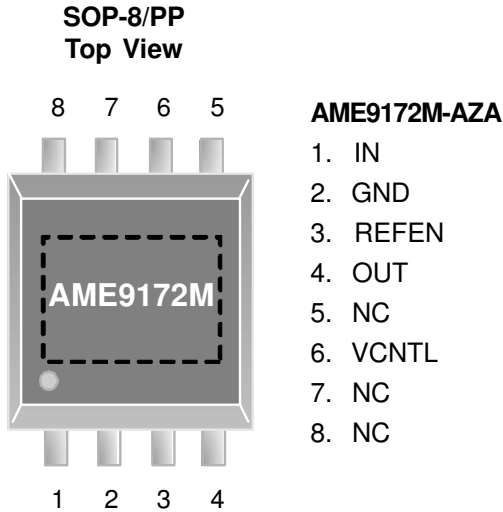
## ■ Applications

- DDR Memory Termination Supply
- Active Termination Buses
- Desktop PC
- Supply Splitters
- Set Top Box/IPC

## ■ Features

- Support All DDR2 (0.9VTT)  
& DDR3(0.75VTT) Requirements
- Capable of Sourcing and Sinking 2A Current
- Current-limiting Protection
- Thermal Protection
- Integrated Power MOSFETs
- Generates Termination Voltages for SSTL-2
- High Accuracy Output Voltage at Full-Load
- Adjustable VOUT by External Resistors
- Minimum External Components
- Shutdown for Standby or Suspend Mode  
Operation with High-impedance Output
- All AME' s Lead Free Products Meet RoHS Standards

**■ Function Block Diagram**

**■ Application Circuit**


**■ Pin Configuration**


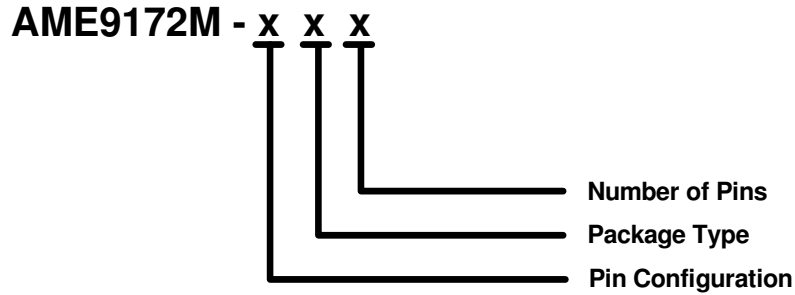
**Die Attach:**  
**Conductive Epoxy**

**Note:**

The area enclosed by dashed line represents Exposed Pad and connect to GND.

**■ Pin Description**

Pin Number	Pin name	Pin Description
1	IN	Power Input
2	GND	Ground
3	REFEN	Input voltage reference & chip enable
4	OUT	Output Voltage
5	NC	No internal connection
6	VCNTL	Driving Voltage
7	NC	No internal connection
8	NC	No internal connection

**■ Ordering Information**


Pin Configuration	PackageType	Number of Pins
A 1. IN (SOP-8/PP) 2. GND 3. REFEN 4. OUT 5. NC 6. VCNTL 7. NC 8. NC	Z : SOP/PP	A : 8

**■ Available Options**

Part Number	Marking	Output Voltage	Package	Operating Ambient Temperature Range
AME9172M-AZA	A9172M AOyMXX	N/A	SOP-8/PP	-40°C to +85°C

**Note:**

1. The first 2 places represent product code. It is assigned by AME such as AO.
2. y is year code and is the last number of a year. Such as the year code of 2008 is 8.
3. A bar on top of first letter represents Green Part such as  $\bar{A}$ 9172M.
4. The last 3 places MXX represent Marking Code. It contains M as date code in "month", XX as LN code and that is for AME internal use only. Please refer to date code rule section for detail information.
5. Please consult AME sales office or authorized Rep./Distributor for the availability of output voltage and package type.

**■ Absolute Maximum Ratings**

Parameter	Symbol	Maximum	Unit
Input Voltage. VIN to GND	$V_{IN}$	6	V
ESD Classification		B*	

Caution: Stress above the listed absolute maximum rating may cause permanent damage to the device.

\* HBM B: 2000V~3999V

**■ Recommended Operating Conditions**

Parameter	Symbol	Rating	Unit
Supply Voltage to VIN	$V_{IN}$	( 1.5 to 2.5 ) $\pm$ 3%	V
Supply Voltage to VCNTL	VCNTL	( 3.3 or 5 ) $\pm$ 5%	V
Output Current of VOUT Pin *	* $I_{OUT}$	-2 to 2	A
Junction Temperature Range	$T_J$	-40 to +150	$^{\circ}$ C
Storage Temperature Range	$T_{STG}$	-65 to +150	$^{\circ}$ C
Ambient Temperature Range	$T_A$	-40 to +85	$^{\circ}$ C

\* The symbol "+" means the VOUT sources current to load; the symbol "-" means the VOUT sinks current to GND

**■ Thermal Characteristics**

Parameter	Package	Die Attach	Symbol	Maximum	Unit
Thermal Resistance* (Junction to Case)	SOP-8/PP	Conductive Epoxy	$\theta_{JC}$	19	°C / W
Thermal Resistance (Junction to Ambient)			$\theta_{JA}$	84	
Internal Power Dissipation			$P_D$	1450	mW
Solder Iron (10Sec)**				350	°C

\*Measure  $\theta_{JC}$  on backside center of Exposed Pad.

\*\* MIL-STD-202G210F

### ■ Electrical Specifications

Limits in standard typeface are for  $T_A = 25^\circ\text{C}$ , unless otherwise specified:

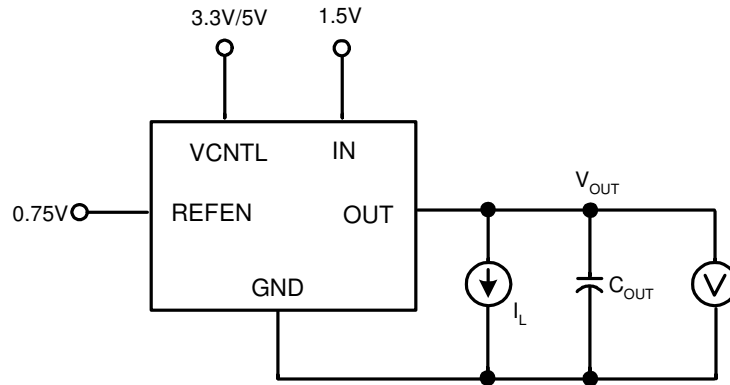
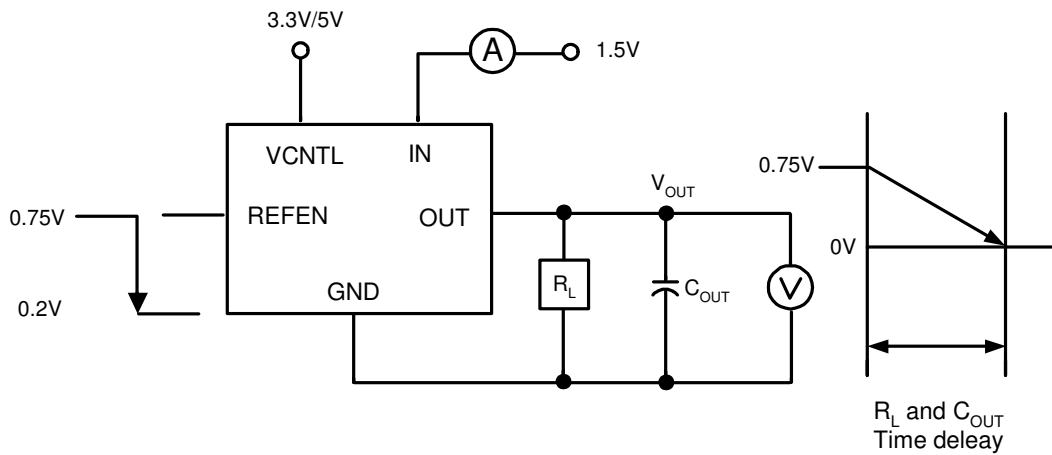
DDR3 =>  $V_{IN} = 1.5\text{V}$ ,  $V_{CNTL} = 3.3\text{V}$ ,  $V_{REFEN} = 0.5V_{IN}$

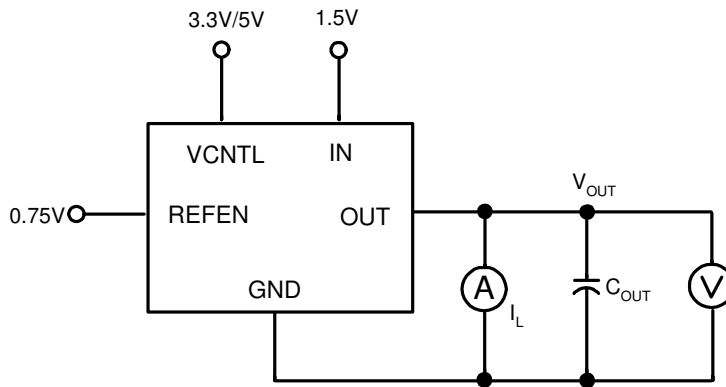
Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Output Offset Voltage	$V_{OS}$	$I_{OUT} = 0\text{A}$ (Note 1)	-20	0	20	mV
Load Regulation (DDR 2 / 3)	$V_{LOAD}$	$I_L = 0$ to 2A	-20	0	20	mV
		$I_L = 0$ to -2A	-20	0	20	
Operating Current of $V_{CNTL}$	$I_{CNTL}$	No Load		0.5	1.5	mA
Short Circuit Protection						
DDR 2 / 3 Current Limit	$I_{LIMIT}$		2.0		4	A
Over Temperature Protection						
Thermal Shutdown Temperature	$T_{SD}$	$V_{CNTL} = 3.3\text{V}$ or 5V		170		°C
Thermal Shutdown Hysteresis		Guaranteed by design		30	50	
Shutdown Threshold	$V_{IH}$	Enable	0.5			V
	$V_{IL}$	Shutdown			0.2	
POR Threshold	$V_{CNTL\_TH}$	Rising Level		2.7	2.9	V
POR Hysteresis	$V_{CNTL\_HYS}$			0.2		V
Short Circuit (Note 2)	$I_{SC\_VIN}$	Sinking	1.5			A
	$I_{SC\_GND}$	Sourcing	1			
Shutdown Current of $V_{CNTL}$	$I_{CNTL\_SD}$	$V_{REFEN}=0\text{V}$ , $I_{OUT}=0\text{V}$ (Fig 3)		50	90	$\mu\text{A}$

Note1:  $V_{OS}$  offset is the voltage measurement defined as  $V_{OUT}$  subtracted from  $V_{REFEN}$ .

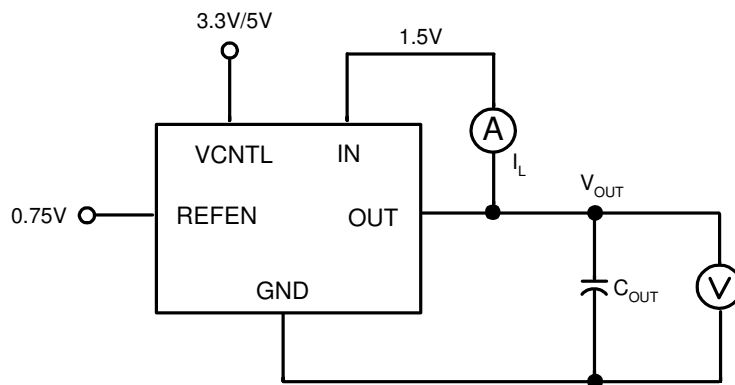
Note2: When testing short-circuit,  $V_{OUT}$  must be lower than 0.4V.

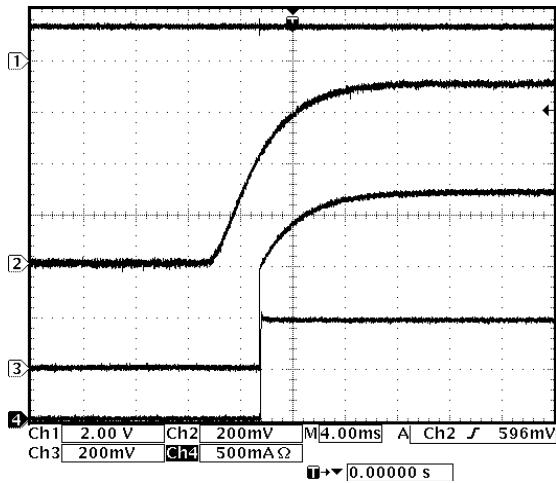
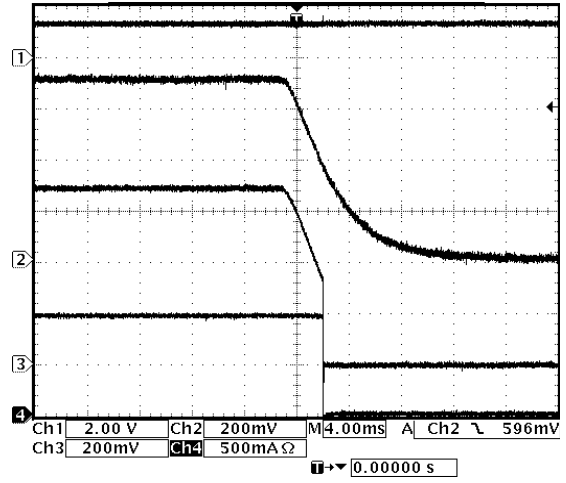


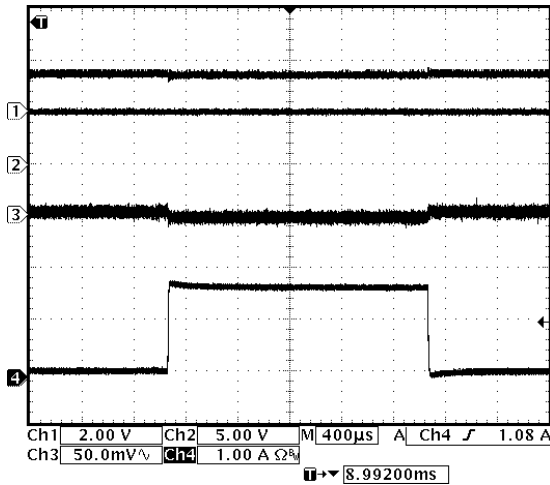
**■ Test Circuit**

**Fig 2: Output Voltage Tolerance,  $\Delta V_{OUT}$** 

**Fig 3: Current in Shutdown Mode,  $I_{SHDN}$**

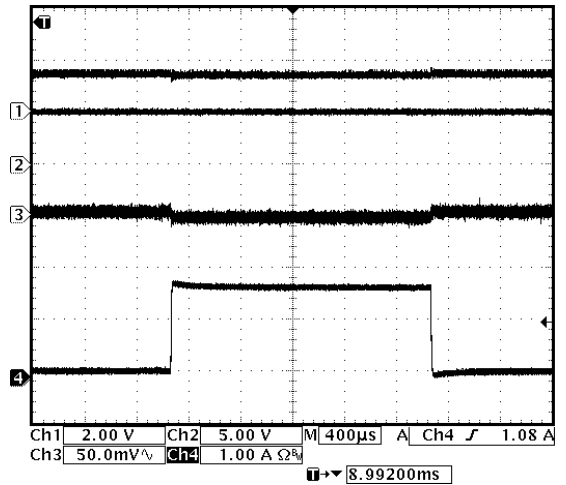
**■ Test Circuit**

**Fig 4: Current Limit for High Side,  $I_{CLHIGH}$** 

Power Supply with Current Limit


**Fig 5: Current Limit for Low Side,  $I_{CLLOW}$**

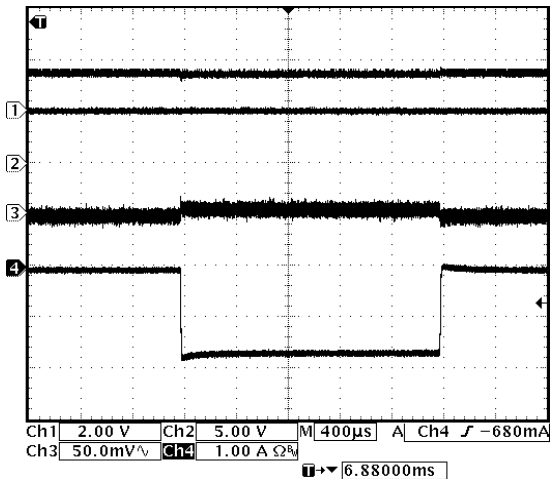
**■ Characterization Curve (For reference only)**
**Enable On From  $V_{REF}$** 
 $V_{IN}=1.4V, V_{CNTL}=5.0V$   
 $V_{REF}=0.5V_{IN}, I_{OUT}=1A$ 

 $Ch1 = V_{IN}, Ch2 = V_{REF}$   
 $Ch3 = V_{OUT}, Ch4 = I_{OUT}$ 
**Enable Off From  $V_{REF}$** 
 $V_{IN}=1.4V, V_{CNTL}=5.0V$   
 $V_{REF}=0.5V_{IN}, I_{OUT}=1A$ 

 $Ch1 = V_{IN}, Ch2 = V_{REF}$   
 $Ch3 = V_{OUT}, Ch4 = I_{OUT}$ 
**Dynamic Load**

 Frequency=2.5KHZ,  $V_{IN}=1.4V$   
 $I_{OUT}=0.1A \sim 1.8A$  and  $1.8A \sim 0.1A$   
 $V_{CNTL}=5.0V$ , Source

 $Ch1 = V_{IN}, Ch2 = V_{CNTL}$   
 $Ch3 = V_{OUT}, Ch4 = I_{OUT}$ 
**Dynamic Load**

 Frequency=2.5KHZ,  $V_{IN}=1.8V$   
 $I_{OUT}=0.1A \sim 1.8A$  and  $1.8A \sim 0.1A$   
 $V_{CNTL}=5.0V$ , Source

 $Ch1 = V_{IN}, Ch2 = V_{CNTL}$   
 $Ch3 = V_{OUT}, Ch4 = I_{OUT}$

**■ Characterization Curve (For reference only)**
**Dynamic Load**

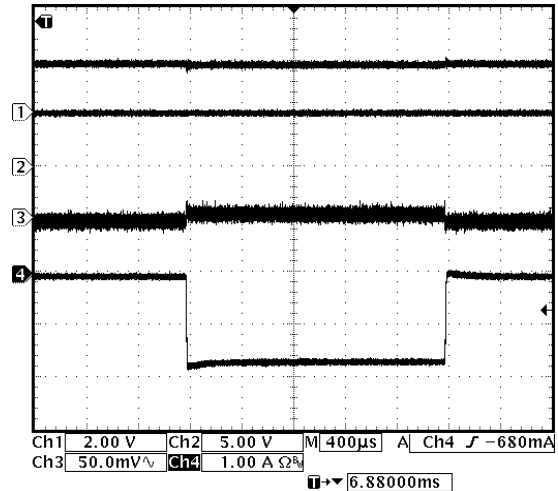
Frequency=2.5KHZ,  $V_{IN}=1.4V$   
 $I_{OUT} = 0.1A \sim 1.8A$  and  $1.8A \sim 0.1A$   
 $V_{CNTL}=5.0V$ , Sink



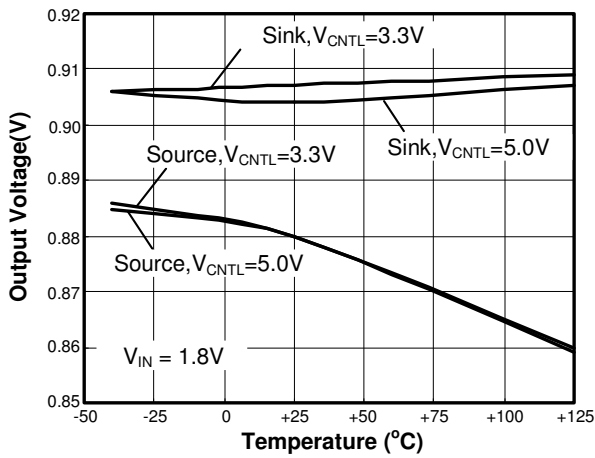
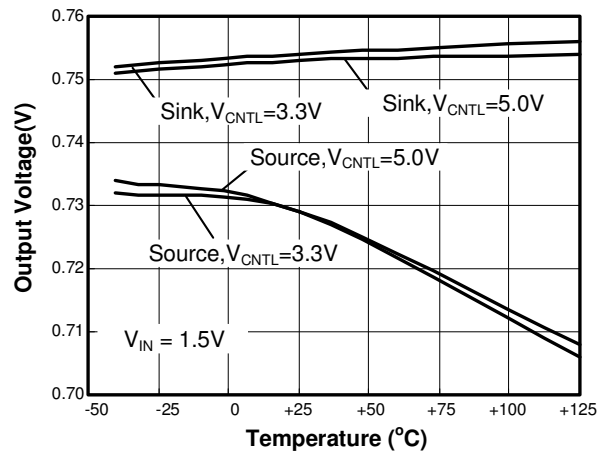
Ch1=  $V_{IN}$  , Ch2=  $V_{CNTL}$   
 Ch3=  $V_{OUT}$  , Ch4=  $I_{OUT}$

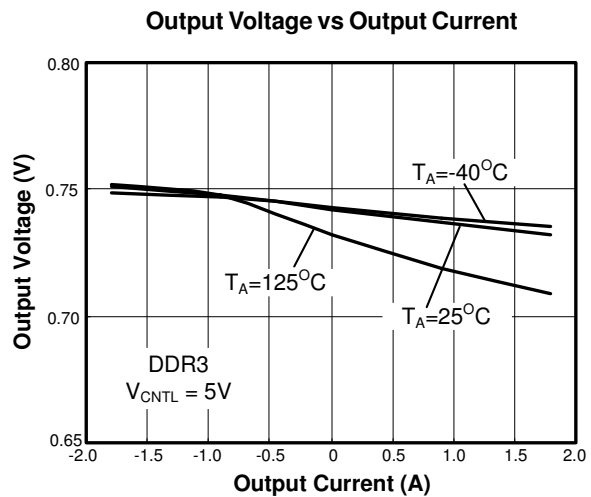
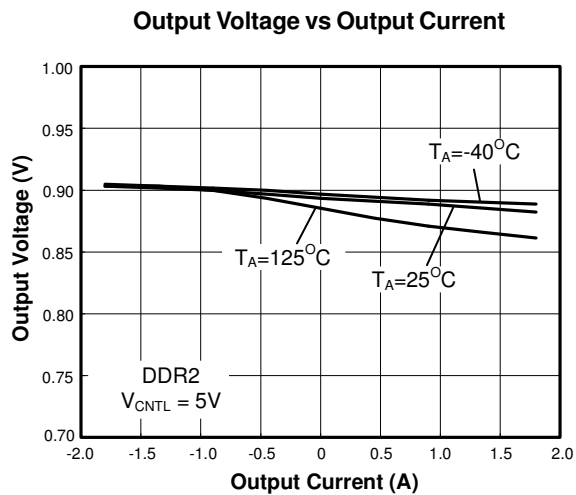
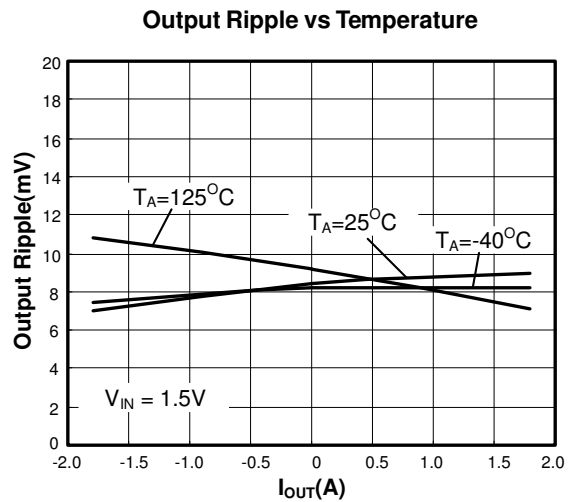
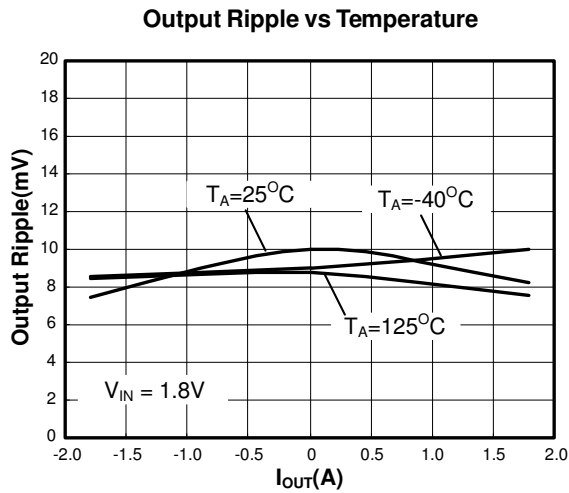
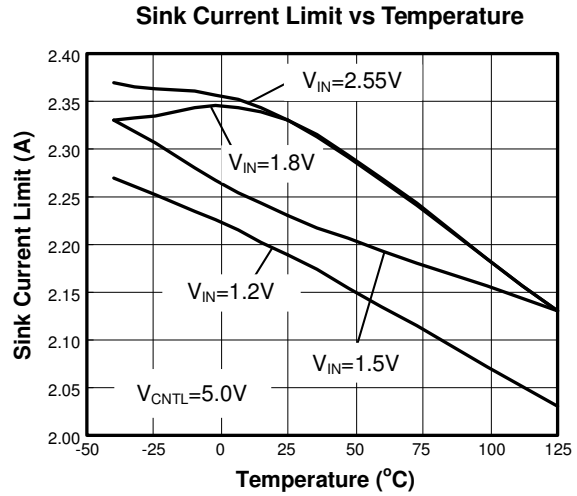
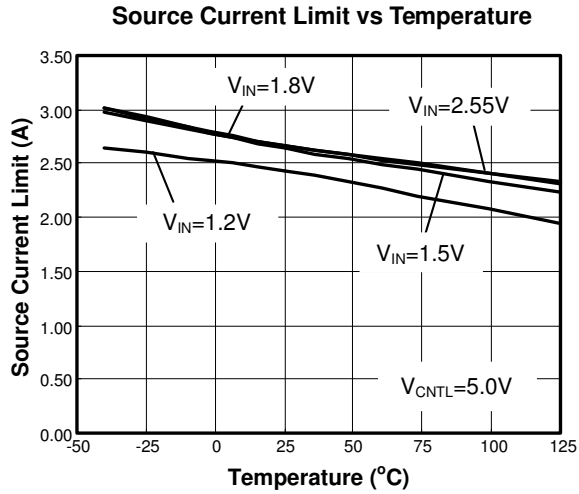
**Dynamic Load**

Frequency=2.5KHZ,  $V_{IN}=1.8V$   
 $I_{OUT} = 0.1A \sim 1.8A$  and  $1.8A \sim 0.1A$   
 $V_{CNTL}=5.0V$ , Sink



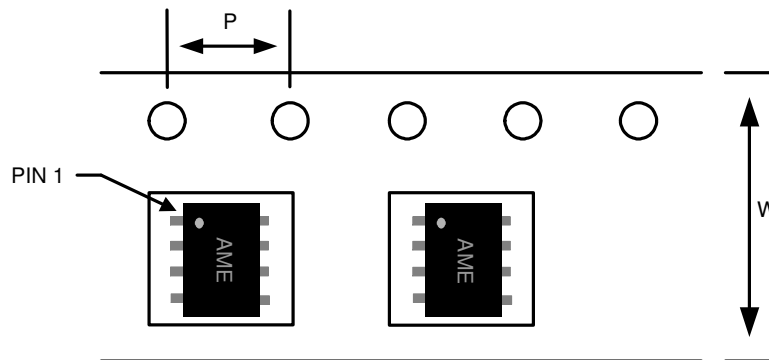
Ch1=  $V_{IN}$  , Ch2=  $V_{CNTL}$   
 Ch3=  $V_{OUT}$  , Ch4=  $I_{OUT}$

**Output Voltage vs Temperature**

**Output Voltage vs Temperature**


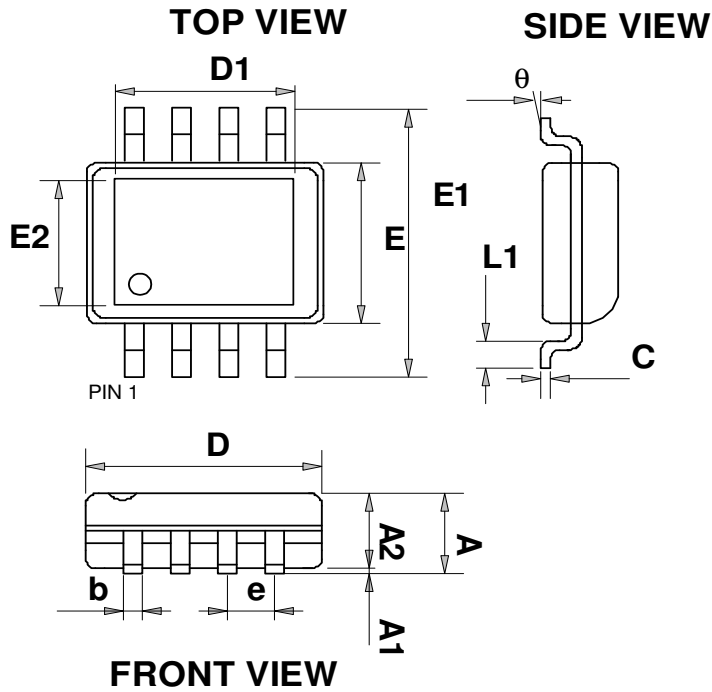
**■ Characterization Curve(For reference only)**


**■ Date Code Rule**

Month Code	
1: January	7: July
2: February	8: August
3: March	9: September
4: April	A: October
5: May	B: November
6: June	C: December

**■ Tape and Reel Dimension**
**SOP-8/PP**

**Carrier Tape, Number of Components Per Reel and Reel Size**

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SOP-8/PP	12.0±0.1 mm	4.0±0.1 mm	2500pcs	330±1 mm

**■ Package Dimension**
**SOP-8/PP**


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
<b>A</b>	1.350	1.750	0.053	0.069
<b>A1</b>	0.000	0.150	0.000	0.006
<b>A2</b>	1.350	1.600	0.053	0.063
<b>C</b>	0.100	0.250	0.004	0.010
<b>E</b>	3.750	4.150	0.148	0.163
<b>E1</b>	5.700	6.300	0.224	0.248
<b>L1</b>	0.300	1.270	0.012	0.050
<b>b</b>	0.310	0.510	0.012	0.020
<b>D</b>	4.720	5.120	0.186	0.202
<b>e</b>	1.270 BSC		0.050 BSC	
<b><math>\theta</math></b>	0°	8°	0°	8°
<b>E2</b>	2.150	2.513	0.085	0.099
<b>D1</b>	2.150	3.402	0.085	0.134



**www.ame.com.tw**  
**E-Mail: sales@ame.com.tw**

Life Support Policy:

These products of AME, Inc. are not authorized for use as critical components in life-support devices or systems, without the express written approval of the president of AME, Inc.

AME, Inc. reserves the right to make changes in the circuitry and specifications of its devices and advises its customers to obtain the latest version of relevant information.

© AME, Inc. , September 2020

Document: 1299-DS9172M-D.01

## **Corporate Headquarter**

### **AME, Inc.**

8F-1, 12 Wen-Hu St. Nei-Hu

Taipei 114, Taiwan.

Tel: 886 2 2627-8687

Fax: 886 2 2659-2989