

Product Change Notices

PCN No.:PCN20221102

Date: 11/30/2022

This is to inform you that **AME8867** datasheet has been changed from **Rev. C.01** to **Rev. D.01**. This notification is for your information and concurrence.

If you require Qual/Rel data or samples to qualify this change, please contact AME, Inc. directly or through AME's authorized Sales Representative or Distributor within 30 days.

Please note this PCN will be effective 30 days after the issuing date automatically if we do not receive any response, comment or questions from you.

If you have any questions concerning this change, please contact:

PCN Originator:

Name: Michael Chang

Email: michaelc@ame.com.tw


Reason for Change:

Revised SOT89, SOP8-PP Lead Pattern on Page17 & 20

From:

Rev. C.01_SOT-89

■ **Lead Pattern**

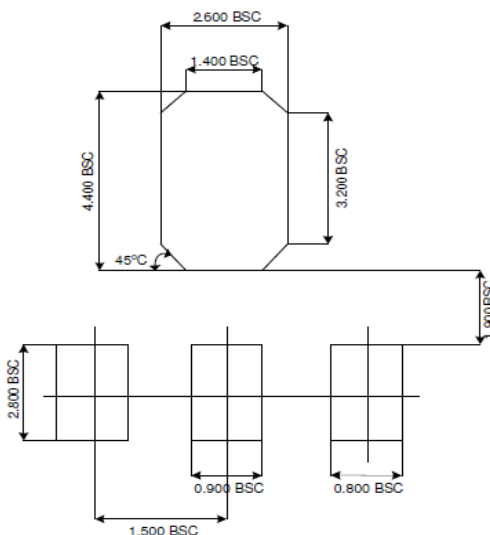


Note:

1. Lead pattern unit description:
BSC: Basic. Represents theoretical exact dimension or dimension target.
2. Dimensions in Millimeters.
3. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified.

To:

Rev. D.01_SOT-89

■ Lead Pattern

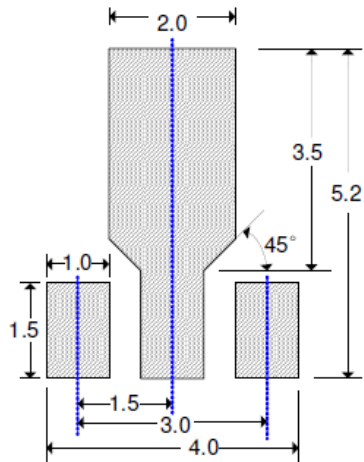


Note:

1. Dimensions in Millimeters.
2. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified.

From:

Rev. C.01_SOP8-PP

■ Lead Pattern

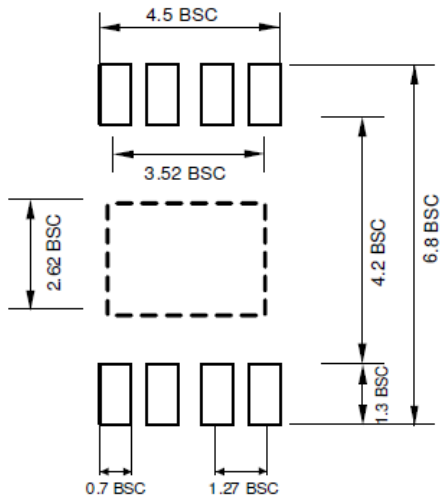


Note:

1. Lead pattern unit description:
BSC: Basic. Represents theoretical exact dimension or dimension target.
2. Dimensions in Millimeters.
3. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified.

To:

Rev. D.01_ SOP8-PP

■ Lead Pattern

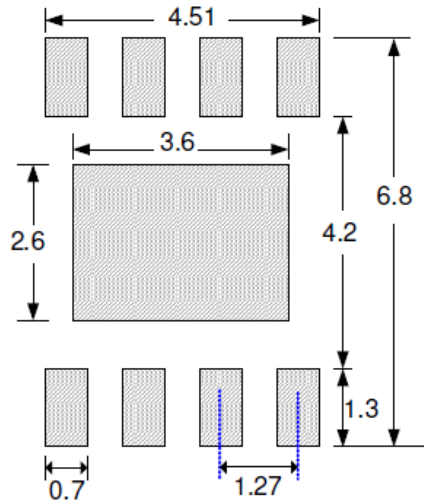

Note:

1. Dimensions in Millimeters.
2. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified.